



SPRAYER BOOM

Item # 169516

Component Parts:

Includes

- (1) wall mount bar
- (1) sprayer boom elbow
- (1) sprayer boom extension
- (1) 25' black utility hose
- (1) nozzle
- (1) female faucet attachment
- (1) male nozzle attachment
- (2) retaining nuts
- (1) hollow coupler
- (1) spray nozzle coupler
- (4) 3/8" x 1 1/4" lag bolts
- (1) locking screw

Hand Tools Needed

- Wrench




nozzle



25' black utility hose



sprayer boom elbow

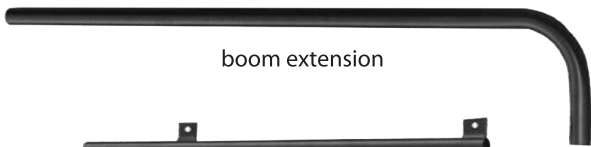

boom extension



wall mount bar



hollow coupler



spray nozzle coupler



retaining nuts



female supply attachment



male nozzle attachment



lag bolts




locking screw

**parts may have been enlarged to show detail*

Assembly & Installation Instructions:

1. Attach wall mount bar to post or wall at desired height using the four 3/8" x 1 1/4" lag bolts.
2. Slide sprayer boom elbow over wall mount bar until it rests securely on the top wall mount bar bracket.

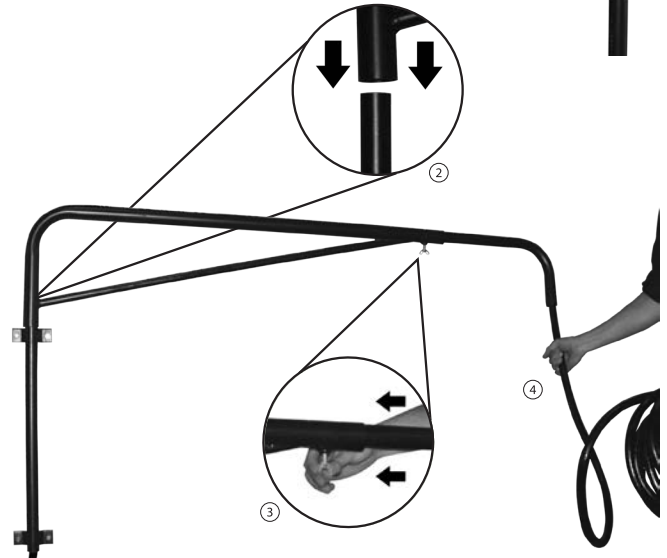

3. Slide boom extension into the sprayer elbow to desired length. Secure in place with the locking screw.
4. Insert hose into boom extension through the boom elbow and down the wall mounting bar to the water source.
5. Screw female supply attachment onto water source.
6. Slide retaining nut over hose end nearest to the faucet.





SPRAYER BOOM


Item # 169516

Assembly & Installation Instructions: (continued)


7. Using a screw driver, fan out hollow coupler fins to allow hose to be inserted into opening. Take care not to damage fins.



8. Slide hose over hollow coupler opening but under fins, as far as hose can go.

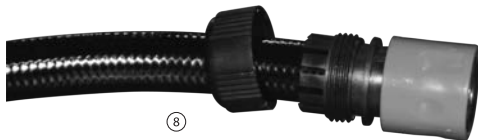

9. With hose inserted in place, tighten retaining nut onto hollow coupler. Repeat steps 6 to 9 for other end of hose and spray nozzle coupler.

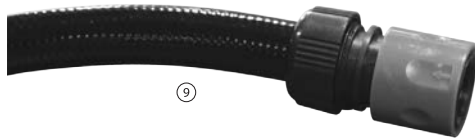

10. Push hollow coupler end of hose onto female supply attachment.

11. Screw male spray nozzle attachment into the provided nozzle.




12. Nozzle is now ready to be connected to hose.




13. To connect, push spray nozzle coupler end of hose onto male spray nozzle attachment.



14. Sprayer Boom is now assembled and ready for use.

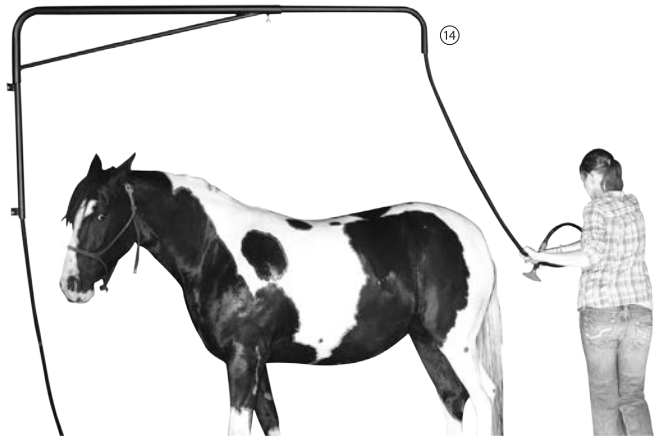

15. To disconnect either coupler end, pull green part of coupler assembly in the direction of printed arrow on coupler.

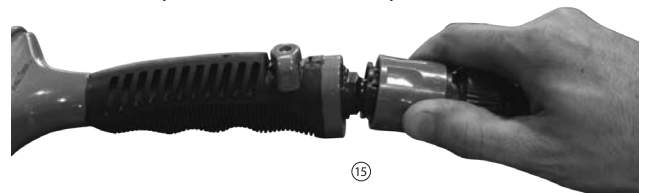

Caution: As with any hosing, the animal must become accustomed to the environment and the hosing gradually. With the Sprayer Boom there will be some movement above the animal's head that may be new.